



**NOTES:**

1. TIE A LOOSE 20" LOOP IN WIRE AT CHANGES IN DIRECTION OF 30° OR GREATER. UNTIE AFTER CONNECTIONS ARE MADE.
2. ALL PIPE WIRE OR SLEEVES UNDER PAVEMENT TO BE INSTALLED PRIOR TO PAVEMENT AND AT A MIN. OF 18" DEEP.
3. BUNDLE AND TAPE WIRE AT 10' INTERVALS.
4. WIRE UNDER PAVEMENT TO BE IN CONDUIT
5. PIPE SLEEVING SHALL BE PVC 40 AND SHALL BE TWO TIMES THE DIAMETER OF THE PIPE TO BE SLEEVED.

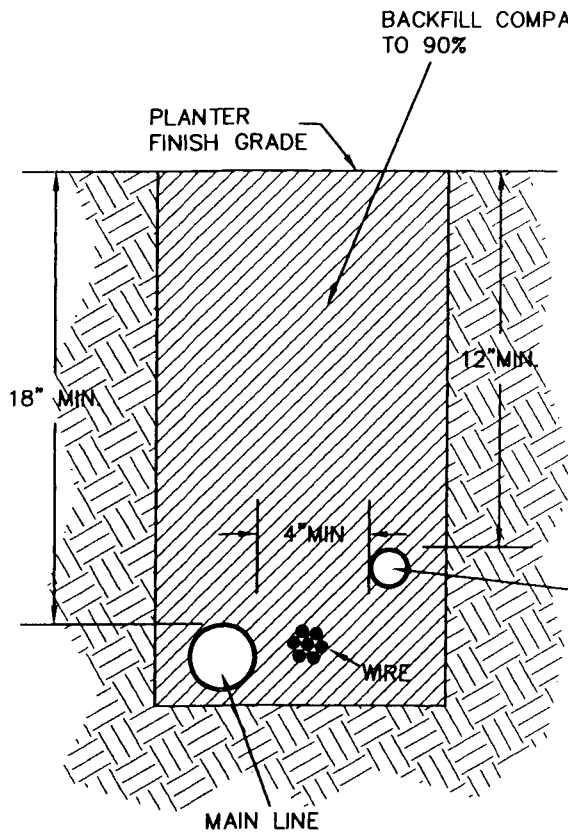

TRENCH IN PLANTER

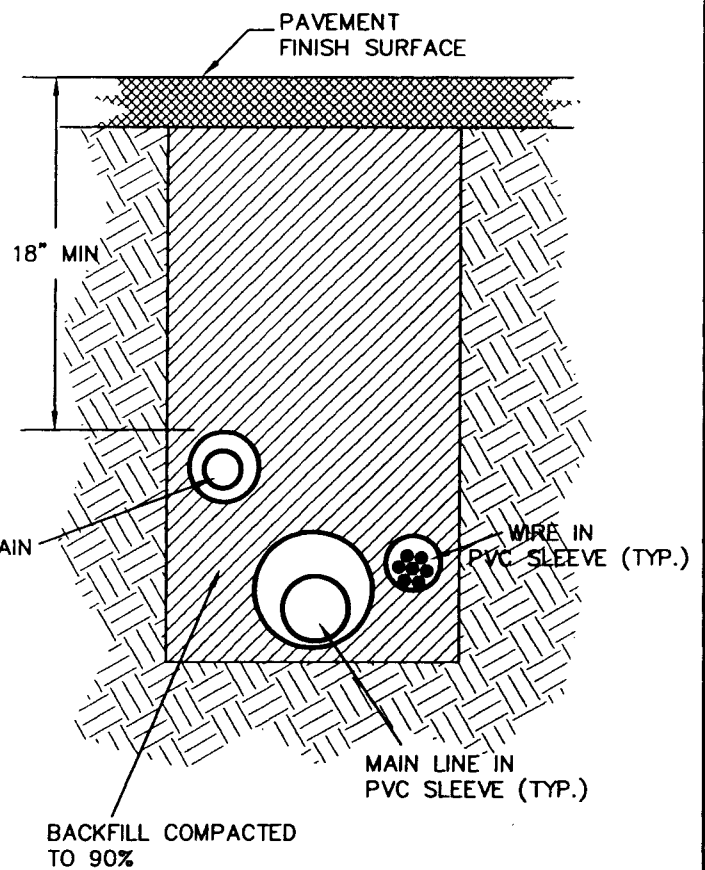

TRENCH UNDER PAVEMENT

**IRRIGATION  
TRENCHING**

	REVISIONS	BY

CITY OF YUBA CITY	
IRRIGATION DETAIL	
IR6	
<i>[Signature]</i>	7/21/09
APPROVED	DATE