
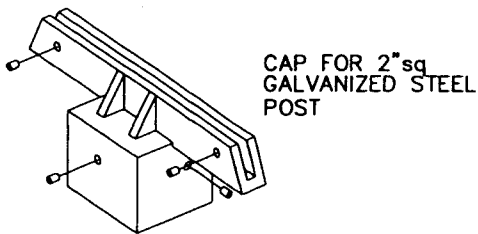


- 9" HIGH INTENSITY REFLECTIVE SIGN.
- 6" CAPITAL REFLECTIVE LETTERS.
- 4" CAPITAL REFLECTIVE LETTERS FOR WAY, DRIVE, AVE, COURT, ETC.



12" SQ. FORMED TOP,  
TROWELED AND TOOLED  
FINISH TO MATCH SIDEWALK.

2"x2" TELESPAR  
OR UNISTRUT  
SQUARE SIGN  
SUPPORT. USE  
14 ga GALVANIZED  
STEEL.

FINISHED  
GRADE

FORM 3 SIDES WHEN  
ADJACENT TO MONOLITHIC  
SIDEWALK, 4 SIDES WHEN  
IN PLANTER AREA.

PORTLAND CEMENT  
CONCRETE

DIAMETER

INSTALL PER MANUF.  
RECOMMENDATIONS.  
FOR BREAK AWAY, SEE  
DETAIL ST16.

NOTES:

1. SIGN LOCATION SHALL NOT BE RELOCATED UNLESS APPROVED BY THE CITY ENGINEER.
2. NAME PLATES & MOUNTING ASSEMBLIES TO MEET THE REQUIREMENTS OF THE CITY ENGINEER.
3. SIGN SHALL BE GREEN WITH WHITE LETTERS (ALL CAPS) AND A 1/2" WHITE BORDER.
4. FONT SHALL BE HIGHWAY GOTHIC "C" (ALL CAPS). NO HEIGHT OR WIDTH VARIATIONS ALLOWED.
5. STREET NAME SIGNS MUST BE INSTALLED WITHIN 7 DAYS AFTER PAVING.
6. USE HEAVY DUTY SLOTTED HIGH TENSION ALUMINUM ALLOY DIE CASTINGS FOR CAPS & CROSS PIECES APPROVED BY THE CITY.

## STREET SIGNS

DATE	REVISIONS	BY

CITY OF YUBA CITY

## STANDARD DETAIL

ST15

6/21/09 7/21/09  
APPROVED DATE