


PLAN VIEW

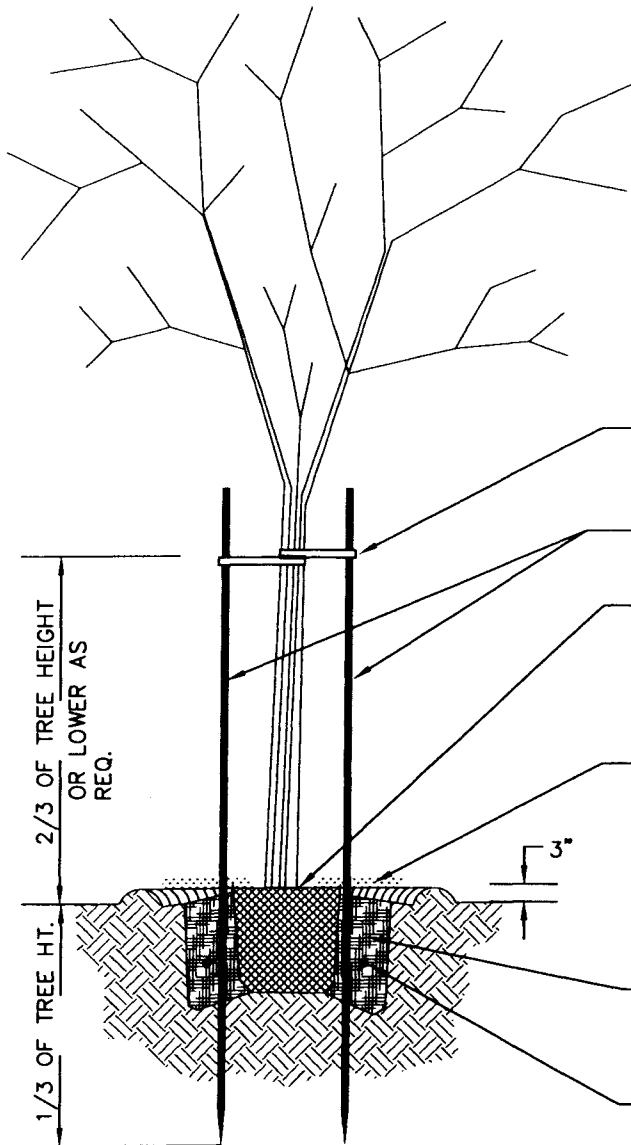

SUPER TREE TIE TAPE. PROVIDE 5"-6" OF SLACK IN TIES TO ALLOW FOR TREE MOVEMENT IN WIND

TWO (2) 2" DIA. TREATED LODGEPOLE TREE STAKES (SET PLUMB) DO NOT PENETRATE ROOTBALL.

ROOTBALL, SET CROWN 2" ABOVE FINISH GRADE PROVIDE POSITIVE DRAINAGE AWAY FROM ROOTBALL. EXTEND STAKES INTO UNDISTURBED SOIL.

KEEP MULCH 1"-2" FROM TRUNK. PLACE 2"-4" THICKNESS OF 3 FOOT DIAMETER MULCH AROUND THE TREE.

PLANTING PIT TO BE TWICE THE DIAMETER OF THE ROOTBALL. MAKE SURE THERE IS NO GLAZING. BACKFILL WITH NATIVE MATERIAL. SET ROOTBALL ON FIRMLY PACKED SOIL TO PREVENT SETTLING. GENTLY PACK BACKFILL USING WATER TO SETTLE SOIL AROUND ROOTBALL.

PLACE FERTILIZERS IN PLANTING PIT PER CITY SPECIAL PROVISIONS.

TREE PLANTING

15 GALLON

	REVISIONS	BY

CITY OF YUBA CITY	
LANDSCAPING DETAIL	
L1	
<i>[Signature]</i>	7/2/09
APPROVED	DATE